

Purchase Agreement

11/14/2017




To:
Ravenna School Lunch
Ken Schroeder
41750 Carthage Road
Ravenna, NE 68869
308-470-0502 (Contact)

Project:
Ravenna School Lunch

From:
Cash-Wa Distributing Co.
Randy Kratochvil
401 West 4th Street
Kearney, NE 68848
800-652-0010 EXT. 7241
FAX (308) 234-4372

Customer 126490

Job Reference Number: 2543

| Item | Qty | Description | Sell | Sell Total |
|----------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------|
| <u>1</u> | 1 ea | PROOFER CABINET, MOBILE  Metro Model No. C519-CFC-U C5™ 1 Series Heated Holding & Proofing Cabinet, mobile, full height, non-insulated, clear polycarbonate door, removable bottom mount control module, thermostat to 190°F, universal wire slides on 3" centers, adjustable on 1-1/2" increments (18) 18" x 26" or (34) 12" x 20" x 2-1/2" pan capacity, 5" casters (2 with brakes), aluminum, 120v/60/1-ph, 2000 watts, 16.7 amps, NEMA 5-20P, cULus, NSF Delivered Price. Plus Sales Tax if applicable. Cash Wa stock item #809337. | \$1,895.00 | \$1,895.00 |
| | | | ITEM TOTAL: | \$1,895.00 |
| | | | Merchandise | \$1,895.00 |
| | | | Total | \$1,895.00 |

****** Prices Good for 30 days******

All material is guaranteed to be specified and the above work to be performed in accordance with the drawings and specifications submitted for above work and completed in a substantial workmanlike manner for the sum of Dollars(\$).

_____ CWD requires a 30% deposit on all special order equipment before the order is placed.

_____ CWD requires a 50% deposit on all custom special order equipment before the order is placed.

Direct Ship Items: Please note it is the responsibility of the customer to file all freight claims directly with the freight company. CWD will not file any direct shipment claims with the freight companies on direct shipments. Please check all items thoroughly at time of delivery and address any issues with the carrier at the time of delivery. We strongly suggest that on direct shipments that boxes are opened and inspected thoroughly at time of delivery before transporter leaves the job site as concealed damage also needs to be reported directly to shipper. All freight companies have a window of time to report concealed damage otherwise they are not responsible and either is CWD.

ITEM 300135-A REPORTING CONCEALED DAMAGE

(a) When damage to, or loss of, contents of a shipping container is discovered by the consignee that could not have been determined at time of delivery it must be reported by the consignee to the delivering carrier upon discovery. (b) Reports must include a request for inspection by the carrier's representative. (c) Notice of loss or damage and request for inspection may be given by telephone or in person, but in either event must be confirmed by a written or electronic communication. (d) While awaiting inspection by carrier, the consignee must hold the shipping container and its contents in the same condition they were in when damage was discovered, insofar as it is possible to do so. (e) **Unless otherwise specified by the carrier, notice of loss or damage should be provided to the carrier within five (5) business days from the date of delivery.** (f) If five (5) business days, or such other period as specified by the carrier, pass between the date of delivery of the shipment by carrier and date of report of loss or damage and request for inspection by consignee, it is incumbent upon the consignee to offer reasonable evidence to the carrier's representative when inspection is made that loss or damage was not incurred by the consignee after delivery of shipment by carrier.

SUPPLEMENT 1 TO NMF 100-AO PROCEDURES GOVERNING THE INVESTIGATION AND DISPOSITION OF FREIGHT CLAIMS FOR LOSS OR DAMAGE

Only participants in the NMFC® at the time the transportation occurs may use the provisions herein. 14 For explanation of abbreviations and reference marks, see last page of this Supplement. ©NMFTA 2015 ITEM 300135-A-Continued (g) Reasonable evidence includes, but is not limited to: 1. Identifying the party(ies) responsible for unloading, 2. Identifying the chain of custody of the article, including prior transportation by any mode, 3. Location(s) of the article(s) once the shipment was received until the damage was noted, 4. Any mechanical or physical handling by the consignee subsequent to delivery by the carrier. (h) If a clear delivery receipt is available on the shipment, e.g. no damage or shortage is noted, the claimant must provide documentation showing that damage or loss occurred prior to delivery

CWD Distributing payment terms for all special or custom order equipment is 7 days from date of invoice.

CWD may file a UCC1 form with the state on all equipment purchased over \$1000.00

_____ If this is a Proposal for an Exhaust System, the customer must meet all NFPA 96 Exhaust Hood Codes &/or Local & State Codes approved by Local Fire Marshall. If not all Codes are met CWD cannot and will not install any of the food service equipment that is to be located under this exhaust system.

Any alterations or deviation from above specifications involving extra costs will be executed upon written orders and will become an extra charge over and above the estimate. All agreements are contingent upon strikes, accidents or delays beyond our control. Owners to carry fire, tornado, and other necessary insurance upon above work. Workman's compensation and public liability insurance on above work to be taken out by:

Respectfully Submitted _____
Cash-Wa Distributing

ACCEPTANCE OF PROPOSAL- the above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outlined.
Remainder payment due within terms upon delivery.

Company: _____

Initial: _____
Page 2 of 3

11/14/2017

Date: _____

Signature: _____

Thank You

Randy Kratochvil- Equipment Sales Specialist

randy.kratochvil@cashwa.com

Acceptance: Kenneth E. Schroeder Date: 11-14-17

Printed Name: Kenneth E. Schroeder

Project Grand Total: \$1,895.00




Item # _____


Job _____

Metro C5 1 Series Non-Insulated Heated Holding and Proofing Cabinets


- **Control:** Three holding modules are available. All feature an easy-to-read digital thermometer, recessed control dials, a master on/off switch, and power indicator lights.
 - **Combination Module:** At the flip of a switch change from heated holding mode to proofing mode. Individual analog controls for temperature and humidity levels.
 - **Holding Module:** For heated holding applications. Analog temperature control and a passive humidity generation system.
 - **Proofing Module:** For proofing applications only. Individual analog controls for temperature and humidity levels.
- **Performance:** All modules provide fast heat-up and recovery through a thermostatically controlled, forced air heating system.
- **Sizes:** C5 1 Series cabinets are available in Full Height (69³/₄", 1772mm), ³/₄ Height (57³/₄", 1467mm), and ¹/₂ Height (42³/₄", 1086mm) sizes.
- **Doors:** Clear polycarbonate doors provide visibility of the contents of the cabinet without the heat loss associated with opening the door.
- **Capacity:** Three slide styles provide maximum holding capacity.
 - **Universal:** Adjustable wire slides, with SiteSelect™, hold 18"x26" sheet, 12"x20" steam table, 2/1 or 1/1 GN pans, and adjust on 1¹/₂" (38mm) increments.
 - **Lip Load:** Fixed aluminum extrusions hold 18"x26" sheet pans on 1¹/₂" (38mm) increments.
 - **Fixed Wire:** Fixed slides hold 18"x26" sheet table, 2/1 GN, or 1/1 GN pans on 3" (76mm) increments.
- **Removable Module:** All modules are removable, without tools, for easy cleaning of the cabinet interior. Future module upgrades or changes can occur without cabinet body replacement.
- **Reliability:** Reliability and durability are designed into every C5. High quality components provide a long life of worry-free use.

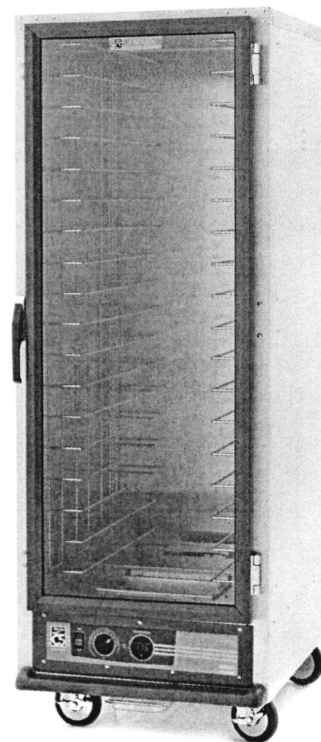


Full Height
Fixed Slides
Holding Module



¹/₂ Height
Fixed Slides
Combination Module



³/₄ Height
Fixed Slides
Combination Module

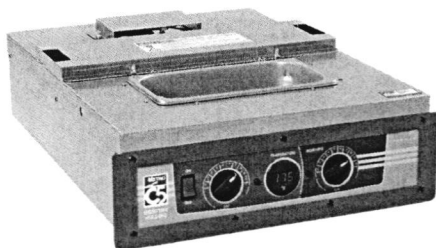

1 Series Removable Control Modules

- **Holding Module:** Hot holding at higher temperatures without moisture control.
- **Proofing Module:** Proofing at lower temperatures. Heat and moisture control for proofing applications.
- **Combination Module:** Hot holding and proofing. Moisture control at lower temperatures (proofing).



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



METRO
C5
C5 1 Series Non-Insulated Heated Holding and Proofing Cabinets

13.91


13.91

C5 1 Series Non-Insulated Heated Holding and Proofing Cabinets



C5 1 Series Non-Insulated Heated Holding and Proofing Cabinets

Specifications

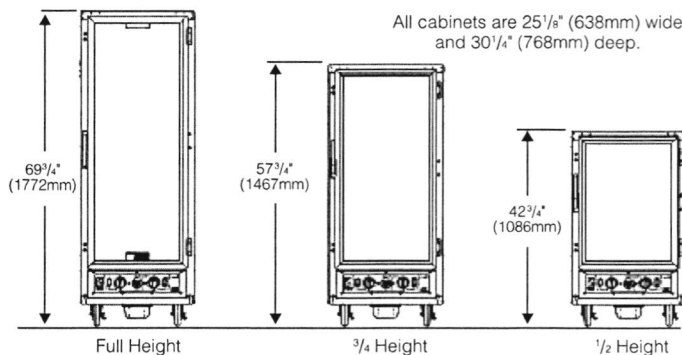

- **Cabinet Material:** .063" (1.8mm) aluminum, natural interior, brushed exterior with .125" (3.2mm) aluminum chassis.
- **Casters:** Four casters with 5" (127mm) donut neoprene wheel, double ball bearing swivel, ball bearing axel, nickel plated, two with brake.
- **Clear Doors:** Extruded aluminum powder coated frame with .090" (2.3mm) polycarbonate window.
- **Hinges:** Field reversible, double hinged, 180° swing, with long-life nylon bearings.
- **Gaskets:** High temperature, door mounted, Santoprene gaskets.
- **Latches:** Polymer, high-strength, magnetic pull latch with lever-action release.
- **Universal Slides:** 1/4" (6.4mm) dia. nickel-chrome electroplated wire, adjustable on 1 1/2" (38mm) increments.
- **Lip Load Slides:** 1 1/2"x1 1/2"x.063" (38x38x1.8mm) extruded aluminum channel slides, 1 1/2" (38mm) fixed spacing.
- **Fixed Wire Slides:** 1/4" (6.4mm) dia. nickel-chrome electroplated wire, welded on 3" (76mm) spacing.
- **Drip Trough:** Smooth polymer drip trough with catch pan.
- **Holding Modules:** Removable without tools, digital thermometer, recessed control dials, master on/off switch, "Power On" light, water pan, ball bearing blower forced air system, 7 1/2' cord, UL, CUL, and NSF Listed.

Electrical and Performance:

- **Combination Module:** 2000 Watt, 120 Volts, 60 Hz., single phase, 16.7 Amps. 80°F to 190°F operating temperature range. 95% RH at 95°F. NEMA 5-20P plug.
- **Holding Module:** 2000 Watt, 120 Volts, 60 Hz., single phase, 16.7 Amps. 80°F to 190°F operating temperature range. NEMA 5-20P plug.
- **Proofing Module:** 1440 Watt, 120 Volts, 60 Hz., single phase, 12 Amps. 80°F to 120°F operating temperature range. 95% RH at 95°F. NEMA 5-15P plug.

Slide Capacities:

| Cabinet Size | Universal Wire Pan Capacity** | | | | Lip Load Pan Capacity | | Fixed Wire Pan Capacity | |
|--------------|-------------------------------|-------|---------|---------------------|-----------------------|--|-------------------------|---------------------|
| | Slide Pairs Provided | Max.* | 18"x26" | 12"x20"x2.5" GN 1/1 | 18"x26" | | 18"x26" | 12"x20"x2.5" GN 1/1 |
| Full Height | 18 | 37 | 18 | 34 | 35 | | 18 | 34 |
| 3/4 Height | 14 | 29 | 14 | 26 | 27 | | 14 | 26 |
| 1/2 Height | 8 | 17 | 8 | 16 | 17 | | 8 | 16 |

*Maximum number of slide pairs @ 1 1/2" spacing. Additional slide pairs ordered separately.

**Capacity based on standard number of slides provided.

Cabinet Height
 9 = Full Height
 7 = 3/4 Height
 5 = 1/2 Height

Module Type
 C = Combination
 H = Heated Holding
 P = Proofing

Slide Type
 U = Universal Wire
 4 = Fixed Wire
 L = Lip Load Aluminum

C519-CFC-U



For Combination and Holding Module Cabinets (120V, 16A, 60Hz, 2000W)

Door Style
 FC = Full Length Clear



For Proofing Module Cabinets (120V, 12A, 60Hz, 1440W)

Export Model Number Description

C519-CXFC-U



Add "X" for Export Cabinets

For Combination and Holding Modules (220-240V, 7.6-8.3A, 50/60Hz, 1681-2000W)

For Proofing Modules (220-240V, 5.5-6A, 50/60Hz, 1210-1440W)

Models with Accessories or Options

C519-CFC-UA

An "A" suffix indicates that accessories need to be factory assembled to the cabinet. Order accessories separately.

Options/Accessories

- Small Item Shelf (C5-SHELF-S)
- Stainless Steel Legs (C5-SSLEGS)
- Universal Slide Pair, Chrome (C5-USLIDEPR-C)
- 6" Casters (C5-6CASTER)
- Rear Rigid Casters (C5-5RDGCSTR)
- Travel Latch (C5-TRVL)
- Flush Door Latch (C5-LATCHFLUSH-1)
- Rear Push Handle (C5-RHANDLE)
- Perimeter Bumper (C5-PERMBUMP-1)
- Straight Plug, 20 Amp, 120V (C5-STRPLG-20)
- Straight Plug, 15 Amp, 120V (C5-STRPLG-15)
- Factory Left-Hand Hinging (DD3768)
- Stainless Steel Universal Slides (please call)

Metro Heated cabinets are for hot food holding applications only.

All Metro Catalog Sheets are available on our website: www.metro.com



InterMetro Industries Corporation

North Washington Street • Wilkes-Barre, PA 18705 • 570.825.2741

Fax: 800.638.9263 (East Coast/Canada) • Fax: 800.638.3292 (West Coast)

FOR PRODUCT INFORMATION/CUSTOMER SERVICE:

U.S./Canada/Latin America: 1.800.992.1776 • Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003 • Middle East/Africa: +971.4.811.8286

Information and specifications are subject to change without notice. Please confirm at time of order

L03-269
 Rev. 05/12
 Printed in U.S.A.

Copyright © 2012 InterMetro Industries Corp.